




– NOTE –

\* INDICATION LAMP COLOR STATUS

NO	LED COLOR STATUS		MODE
	GREEN	RED	
1	Steady	–	Fully charged
2	Flash once per 2secs	–	Charging
3	–	Flash twice per 4secs	Battery defects
4	–	Flash once per 1secs	Discharging
5	–	Flash once per 4secs	EXT switch is open

NO	CONTENT	DATE	REVISER	APPROVAL
△				
△				
△				

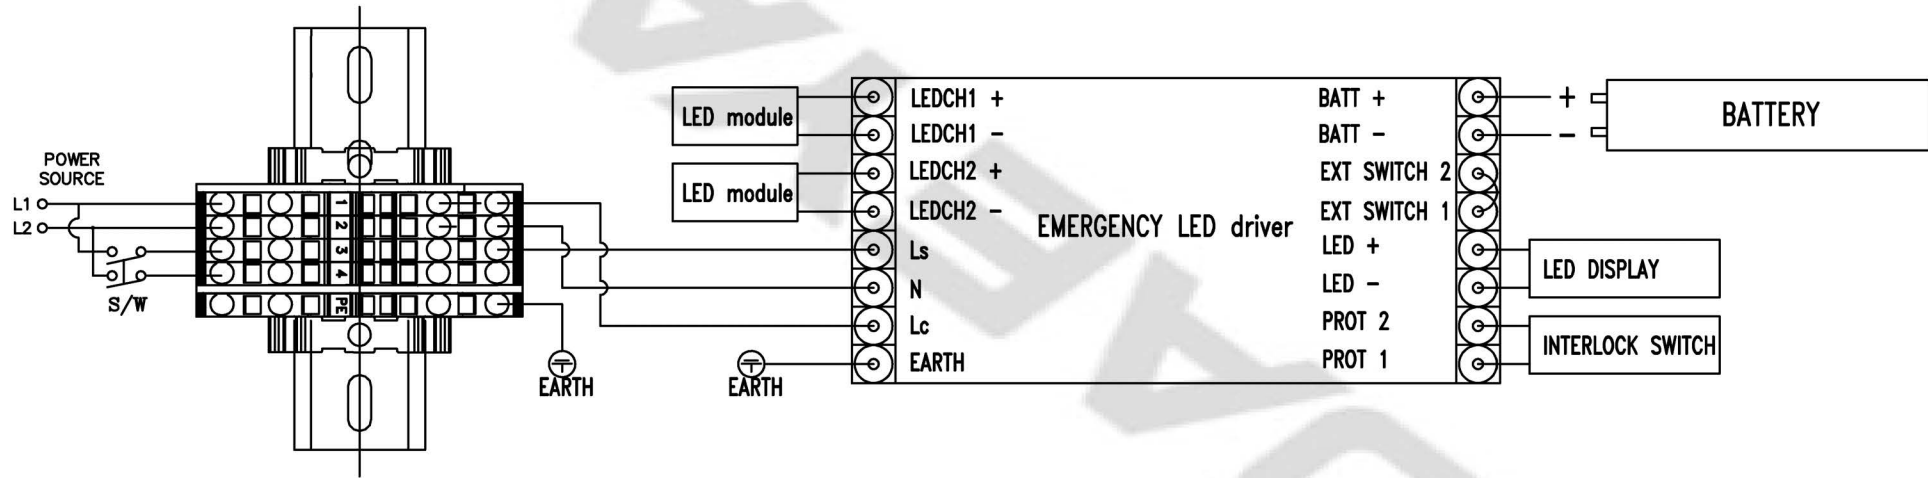

– WARNING –

1. After LIGHTING is installed, please connect the inverter connector.
2. When the continuous power is not supplied, connector should be disconnected to avoid natural discharge of battery.

CONNECTION DIAGRAM(1 LED driver 2 LED module)

TITLE : EXLED-125edBu/EXLED-225edBu				SCALE	N/S	UNIT	MM	NO.	REVISED
				PROJECT METHOD	⊕	WEIGHT	KG	△	
				APPROVED	B. I. KIM			△	
				CHECKED				MATERIAL	–
				DRAWN	B. I. KIM			DWG NO.	EXLED-125edBu
				DATE	2015.12.04			SHEET NO.	3-A