
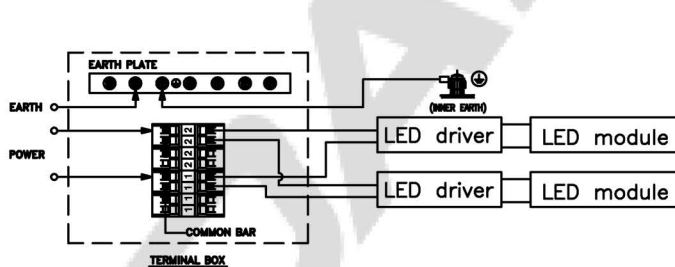


CAPACITY	SYMBOL/ SERIAL NO.	CIRCUIT DIAGRAM
AC100-240V, 50/60Hz		
25W x 2		

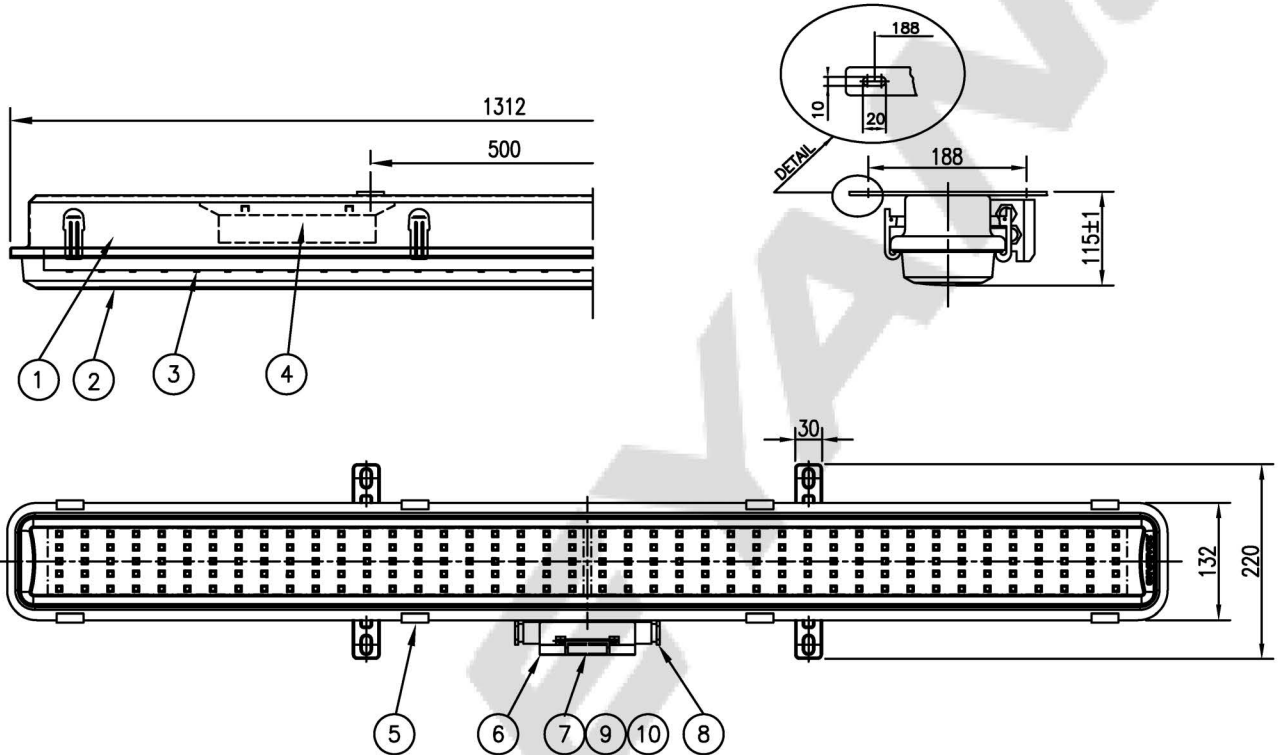

CIRCUIT DIAGRAM

10	TERMINAL BLOCK	NYLON	1	CLAMPING 4P	5	LATCH	STS304	8	
9	INSIDE EARTH BOLT	STS304	4		4	LED driver	-	2	
8	CABLE GLAND(PG21)	NYLON	4	φ12.1~15.5	3	LED module	-	2	4,000±300K
7	TERMINAL BOX COVER	POLYCAR-BONATE	1		2	GLOBE	POLYCAR-BONATE	1	
6	TERMINAL BOX	POLYCAR-BONATE	1		1	BODY	STEEL	1	
NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS	NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS

APPROVED	B. K. KIM	UNIT	MM
CHECKED	J. W. PARK	SCALE	N/S
DRAWING	M. S. KANG	COLOR	N-9.3
DATE	2016.04.18	IP	56

TITLE; LED CEILING LIGHT (SURFACE TYPE) FOR MARINE USE

	MODEL NO.	LEB225WS-0550SWNMGLw15QC40	WEIGHT	7.7 kg
	DWG NO.	LO1480220	SHEET NO.	3