
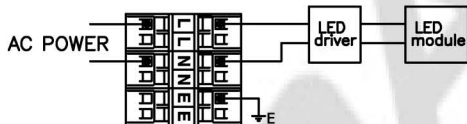


CAPACITY	SYMBOL/ SERIAL NO.	CIRCUIT DIAGRAM
AC100-240V, 50/60Hz		
16W		

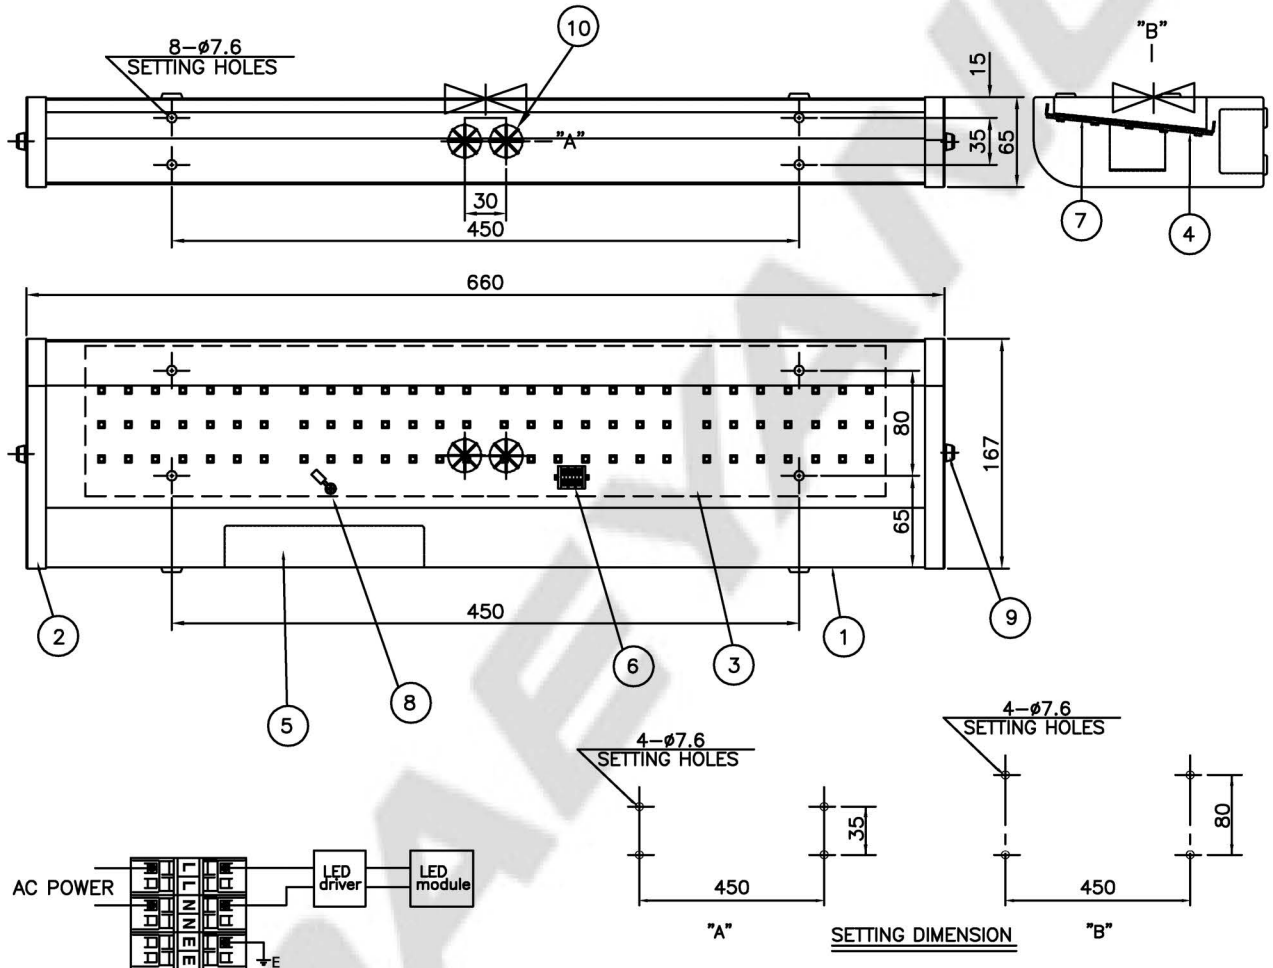

CIRCUIT DIAGRAM

**\* CAUTION**  
 When cleaning globe, please wipe clean with a damp cloth.  
 Do not use thinner or (organic) solvent.

10	CABLE INLET HOLES	NYLON	4	Ø16 SNAP BUSHING	5	LED driver	-	1	
9	COVER BOLT	UREA	2		4	LED module	-	1	3,000±300K
8	INSIDE EARTH BOLT	STEEL	1		3	GLOBE	ACRYL	1	MILKY
7	LED module BRACKET	STEEL	1		2	SIDE COVER	ABS	2	
6	TERMINAL BLOCK	-	1	CLAMPING 3P	1	BODY	STEEL	1	
NO.	NAME OF PARTS	MATERIAL	Q'TY	REMARKS	NO.	NAME OF PARTS	MATERIAL	Q'TY	REMARKS

APPROVED	B. K. KIM	UNIT	MM	TITLE; <b>LED CORNER LIGHT (SURFACE TYPE) FOR MARINE USE</b>			
CHECKED		SCALE	N/S				
DRAWING	B. I. KIM	COLOR	N-9.3				
DATE	2015.12.04	IP	20				
<b>DAEYANG</b>				MODEL NO.	LEBN116NS-0550QC30-WG	WEIGHT	3.75 Kg
				DWG NO.	LO3230010	SHEET NO.	8