CAPACITY	SYMBOL/SERIAL NO.	CIRCUIT DIAGRAM
AC100–240V, 50/60Hz	L300X2	LED driver — LED
400W		

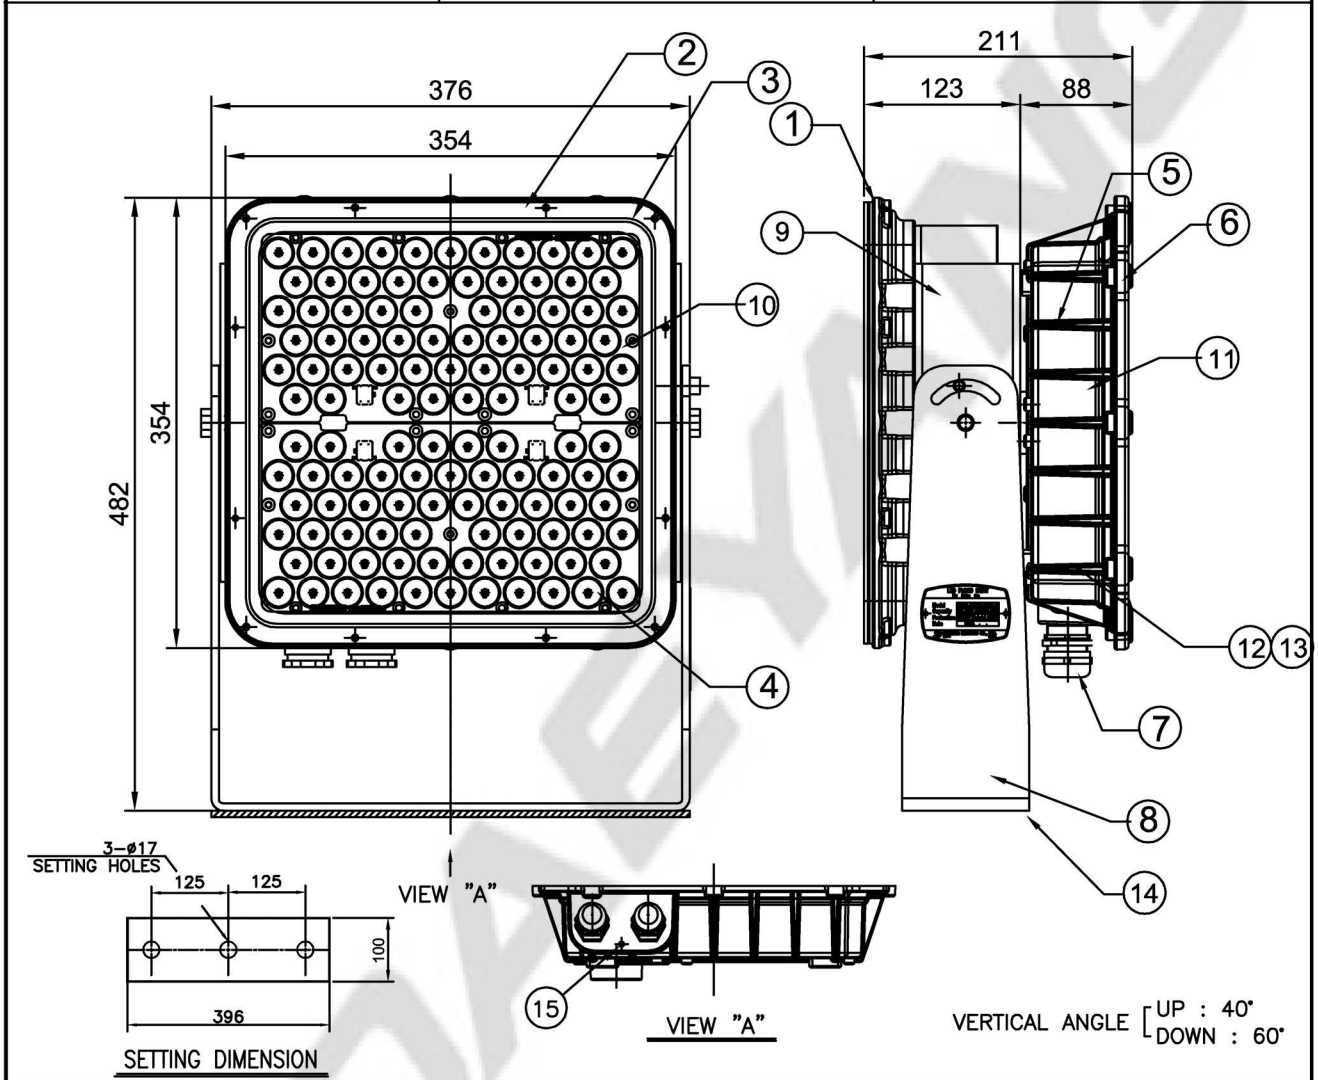

NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS	NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS
16	NAME PLATE	STAINLESS STEEL316L	1		8	ARM	STAINLESS STEEL316L	1	
15	OUTSIDE EARTH BOLT	STAINLESS STEEL316L	1	M5	7	CABLE GLAND (R25M)	BRASS	2	ø9~ø17
14	ANTI–VIBRATION PACKING	C.R.	1	5t	6	LED driver CASE COVER	ALUMINIUM	1	
13	INSIDE EARTH BOLT	STAINLESS STEEL304	1		5	LED driver CASE	ALUMINIUM	1	
12	TERMINAL BLOCK	–	2		4	FRONT GLASS	GLASS	1	
11	LED driver	–	2		3	GLOBE PACKING	SILICONE	1	
10	LED module	–	2		2	GLOBE FRAME	STAINLESS STEEL316L	1	
9	BODY BRACKET	STAINLESS STEEL316L	2		1	BODY	ALUMINIUM	1	

APPROVED	S. H. HONG	UNIT	MM
CHECKED	J. K. LEE	SCALE	N/S
DESIGN	P. J. MAENG	COLOR	N–9.3
DATE	2019.07.01	IP	66 / 67

TITLE:

LED FLOOD LIGHT
(BEAM ANGLE 15°)
FOR MARINE USE

DAEYANG

MODEL NO.	PF400L–550AWCF–D15C60–E	WEIGHT	26Kg
DRAWING NO.	LR6530081	SHEET NO.	13

[보안인증] 이주헌 2019/12/19 11:03:49